Full Voltage, Non-Reversing Starters, with Bimetallic or Electronic Overload

Frame B

Three-Pole Starters, Frame B—Maximum UL/CSA Ratings ①

Single-Phase hp Ratings		Three-Phase hp Ratings				Auxiliary Contacts	Catalog Number ②③
115V	230V	200V	230V	460V	575V		
1/4	1	1-1/2	2	3	5	1NO	**XTAE007B10_ _**
1/4	1	1-1/2	2	3	5	1NC	**XTAE007B01_ _**
1/2	1-1/2	3	3	5	7-1/2	1NO	**XTAE009B10_ _**
1/2	1-1/2	3	3	5	7-1/2	1NC	**XTAE009B01_ _**
1	2	3	3	10 ④	10	1NO	**XTAE012B10_ _**
1	2	3	3	10 ④	10	1NC	**XTAE012B01_ _**
1	3	5	5	10 ④	10	1NO	**XTAE015B10_ _**
1	3	5	5	10 ④	10	1NC	**XTAE015B01_ _**

Three-Pole Starters, Frame B—Maximum IEC Ratings ①

AC-3 I_e(A)	AC-1	Three-Phase Motors 50–60 Hz 220/230V	380/400V	415V	660/690V	Auxiliary Contacts	Catalog Number ②③
7	20	2.2	3	4	3.5	1NO	**XTAE007B10_ _**
7	20	2.2	3	4	3.5	1NC	**XTAE007B01_ _**
9	20	2.5	4	5.5	4.5	1NO	**XTAE009B10_ _**
9	20	2.5	4	5.5	4.5	1NC	**XTAE009B01_ _**
12	20	3.5	5.5	7	6.5	1NO	**XTAE012B10_ _**
12	20	3.5	5.5	7	6.5	1NC	**XTAE012B01_ _**
15.5	20	4	7.5	8	7	1NO	**XTAE015B10_ _**
15.5	20	4	7.5	8	7	1NC	**XTAE015B01_ _**

Frame C

Three-Pole Starters, Frame C—Maximum UL/CSA Ratings ①

Single-Phase hp Ratings		Three-Phase hp Ratings				Auxiliary Contacts	Catalog Number ②③
115V	230V	200V	230V	460V	575V		
2	3	5	5	10 ④	15	1NO	**XTAE018C10_ _**
2	3	5	5	10 ④	15	1NC	**XTAE018C01_ _**
2	5	7-1/2	7-1/2	15	20	1NO	**XTAE025C10_ _**
2	5	7-1/2	7-1/2	15	20	1NC	**XTAE025C01_ _**
3	5	10	10	20	25	1NO	**XTAE032C10_ _**
3	5	10	10	20	25	1NC	**XTAE032C01_ _**

Three-Pole Starters, Frame C—Maximum IEC Ratings ①

AC-3 I_e(A)	AC-1	Three-Phase Motors 50–60 Hz 220/230V	380/400V	415V	660/690V	Auxiliary Contacts	Catalog Number ②③
18	35	5	7.5	10	11	1NO	**XTAE018C10_ _**
18	35	5	7.5	10	11	1NC	**XTAE018C01_ _**
25	40	7.5	11	14.5	14	1NO	**XTAE025C10_ _**
25	40	7.5	11	14.5	14	1NC	**XTAE025C01_ _**
32	40	10	15	18	17	1NO	**XTAE032C10_ _**
32	40	10	15	18	17	1NC	**XTAE032C01_ _**

Notes

① Products shown are with the bimetallic overload relay.

② Underscore (_) indicates magnet coil suffix required. See **Page V5-T1-53**.

③ Underscore (_) indicates overload relay suffix required. See **Page V5-T1-54**.

④ For electrical life contactor application data. See **Page V5-T1-53**.

Approximate Dimensions in mm [in]

XTAE Starters with XTOB Overload Relay

Frame B, XTAE007B–XTAE015B Starters with XTOB (7–12A)

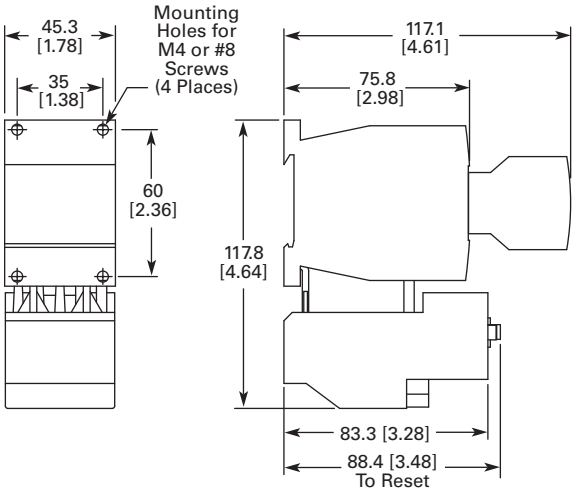

Frame C, XTAE018C–XTAE032C Starters with XTOB (18–32A)

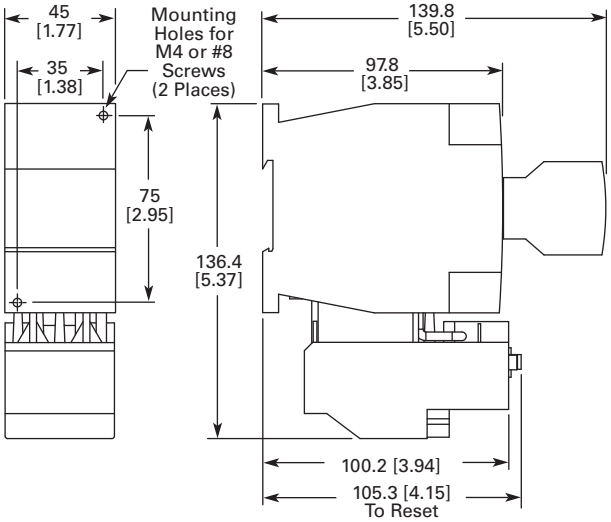
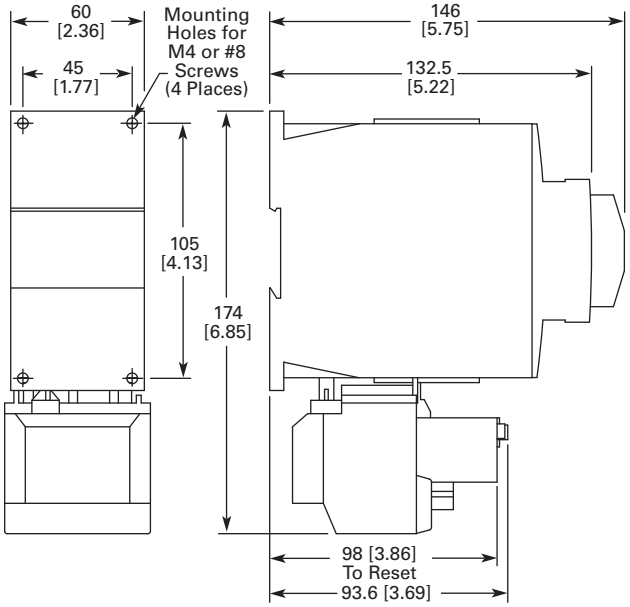
Frame D, XTAE040D–XTAE065D Starters with XTOB (40–65A)