Product Selection

Product Selection for Manual Motor Starter Applications

When ordering, specify catalog numbers according to the following stipulations:

XT manual motor protectors are selected based on the overload current range required for a given motor. This current range is determined from the motor full load ampere rating and motor service factor usually found on the motor nameplate.

For motors with service factors less than 1.15, multiply the motor FLA by 0.90 to select appropriate MMP.

Example: For motor having FLA of 6.4A and service factor of 1.0 (6.4A x 0.90 = 5.76A) select catalog number XTPB6P3B01.

See Application Note—AP03402001E.

For motor with service factor of 1.15 or greater, use motor nameplate full load amperes to select the appropriate MMP.

Example: For motor having FLA of 11A and service factor of 1.15, select catalog number XTPR012BC1.

Frame B

XTPB Pushbutton Manual Motor Protectors—Global and North American Ratings—Frame B

Type 1 and Type 2 Coordination Motor Protective Device with Thermal and Magnetic Trip

Rated Uninterrupted Current— $I_u = I_e$ (Amps)	FLA Adjustment Range/ Overload Release— I_r (Amps)	Short Circuit Release— I_{rm} (Amps)	Maximum Motor Ratings ① Maximum kW Rating AC-3—P (kW) Three-Phase 220–240V	380–415V	440V	500V	660–690V	Maximum hp Rating—P (hp) UL 508/CSA C22.2 No. 14 Three-Phase 200V	240V	480V	600V	Screw Terminal Catalog Number
0.16	0.1–0.16	2.2	—	—	—	—	0.06	②	②	②	②	**XTPBP16BC1**
0.25	0.16–0.25	3.5	—	0.06	0.06	0.06	0.12	②	②	②	②	**XTPBP25BC1**
0.4	0.25–0.4	5.6	0.06	0.09	0.12	0.12	0.18	②	②	②	②	**XTPBP40BC1**
0.63	0.4–0.63	8.8	0.09	0.12	0.18	0.25	0.25	②	②	②	②	**XTPBP63BC1**
1	0.63–1	14	0.12	0.25	0.25	0.37	0.55	②	②	2	1/2	**XTPB001BC1**
1.6	1–1.6	22	0.25	0.55	0.55	0.75	1.1	②	②	3/4	3/4	**XTPB1P6BC1**
2.5	1.6–2.5	35	0.37	0.75	1.1	1.1	1.5	1/2	1/2	1	1-1/2	**XTPB2P5BC1**
4	2.5–4	56	0.75	1.5	1.5	2.2	3	3/4	3/4	2	3	**XTPB004BC1**
6.3	4–6.3	88	1.1	2.2	3	3	4	1	1-1/2	3	5	**XTPB6P3BC1**
10	6.3–10	140	2.2	4	4	4	7.5	3	3	7-1/2	10	**XTPB010BC1**
12	8–12	168	3	5.5	5.5	5.5	11	3	3	7-1/2	10	**XTPB012BC1**
16	10–16	224	4	7.5	9	9	12.5	3	5	10	10	**XTPB016BC1**
20	16–20	280	5.5	9	11	12.5	15	5	—	—	15	**XTPB020BC1**
25	20–25	350	5.5	12.5	12.5	15	22	—	7-1/2	15	20	**XTPB025BC1**

Notes

Single-phasing sensitivity to IEC/EN 60947-4-1, VDE 0660 Part 102.

Can be snap-fit to IEC/EN 60715 top-hat (DIN) with 7.5 or 15 mm height.

Service Factor (SF)—Setting I_r of current scale in dependence of load factor:
SF = 1.15 → $I_r = 1 \times I_{n\ mot}$
SF = 1 → $I_r = 0.9 \times I_{n\ mot}$

For manual motor protective circuit breaker switching capacity, see **Page V5-T1-181**.

① Select manual motor protectors by full load amperes. Maximum motor ratings (kW, hp) are for reference only.
② In this range, calculate motor rating according to rated current. Specified values to NEC 430.6(A)(1).

Dimensions

Approximate Dimensions in mm [in]

Manual Motor Protectors—XTPB

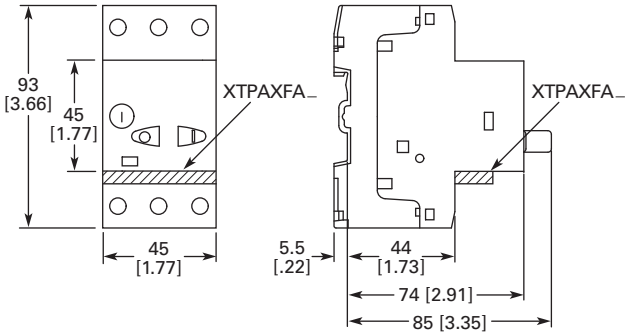

Manual Motor Protectors, Manual Transformer Protectors—XTPR...B

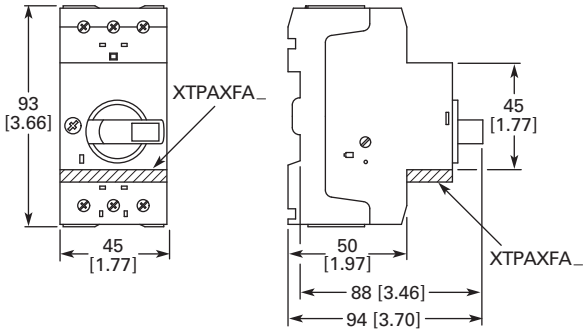

Manual Motor Protector—XTPR...DC1

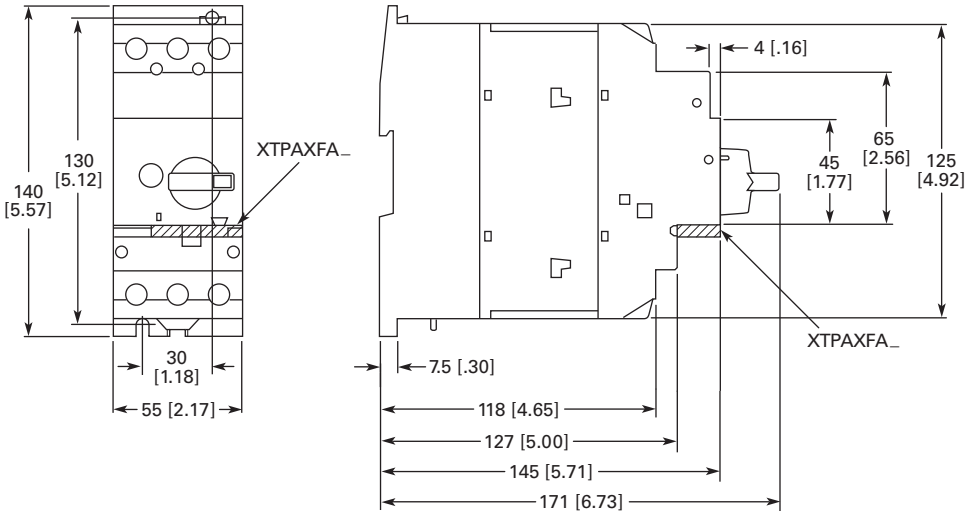

Current Limiter—XTPAXCL

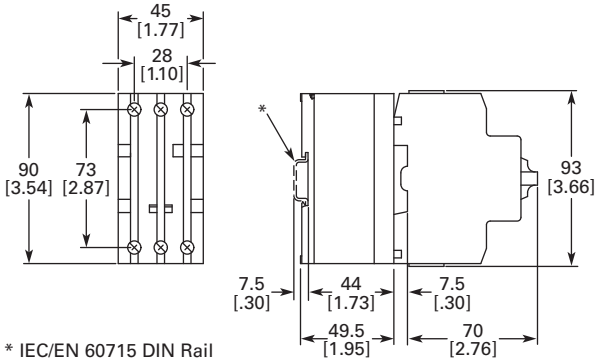

* IEC/EN 60715 DIN Rail
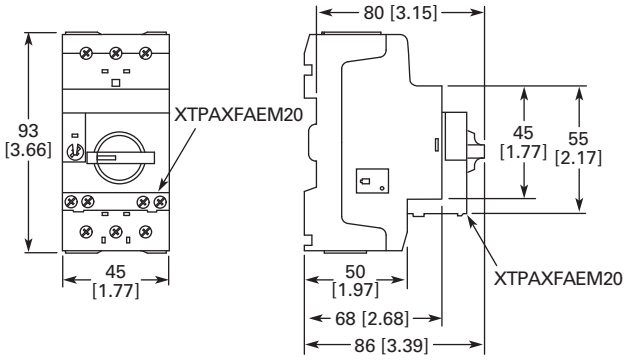
MMPs with Early-Make Auxiliary Contacts—XTPR...BC1 + XTPAXFAEM20