



Door coupling version **GUS** with **GUSH** and **GUSS**

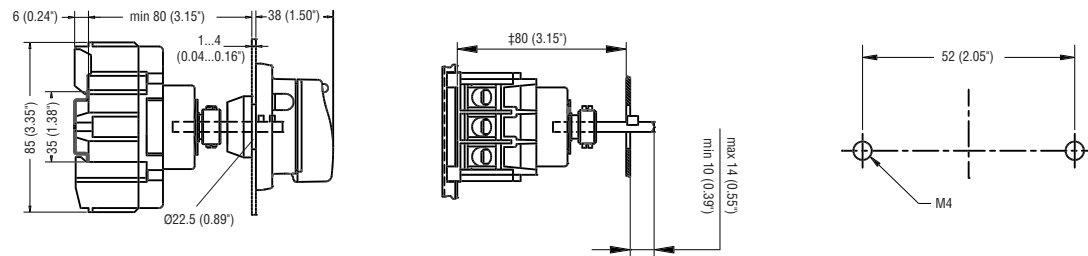


## IEC style contactors DP definitive purpose contactors

THREE AND FOUR-POLE BG AND DPBG MINI-CONTACTORS AND CONTROL RELAY WITH AC OR DC COIL


**BG** mini-contactors or control relay  
**DPBG** definite purpose contactor

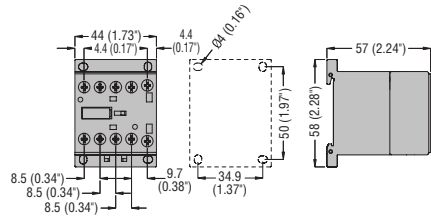


**BG** and **DPBG** mini-contactors  
with screw terminals and RF...9 thermal relay

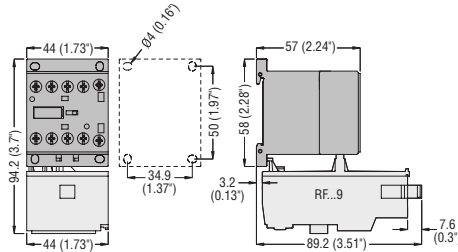


**BGS** with front PCB solder pins

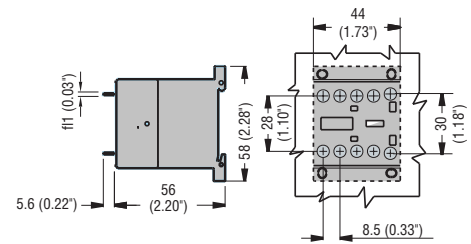

**BGP**  
with rear PCB solder pins

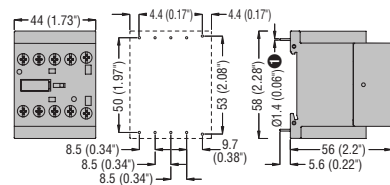


**BGF**  
with Faston terminals

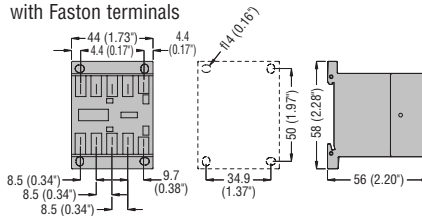


① Recommended PCB drillings 1.7-2mm (0.07-0.08in).

**BF** AND **DPBF** CONTACTORS WITH AC COIL


**BF00A** control relay - **DPBF09A** - **DPBF12A** - **DPBF18A** definite purpose and **BF09A** - **BF12A** - **BF18A** - **BF25A** contactors four poles

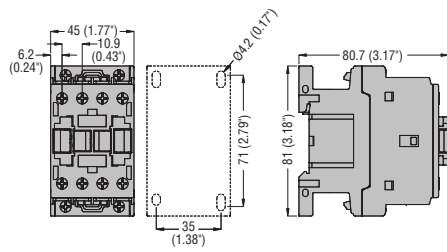


**BF09A** - **BF12A** - **BF18A** - **BF25A** - **DPBF09A** - **DPBF12A** - **DPBF18A** three poles with RF...38 thermal relay

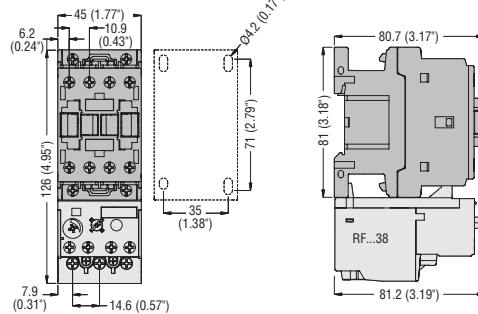

**BF26A** - **BF32A** - **BF38A** - **DPBF26A** - **DPBF32A** three poles with RF...38 thermal relay

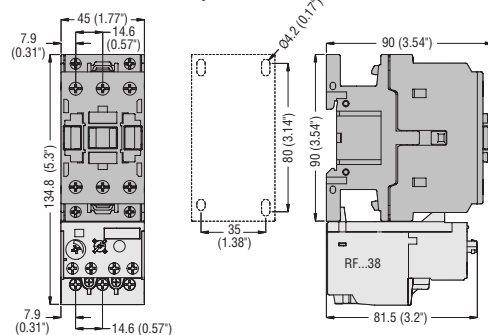

**BF26 T** - **BF32 T** - **BF38 T** - **DPBF26 T** - **DPBF32 T** four poles

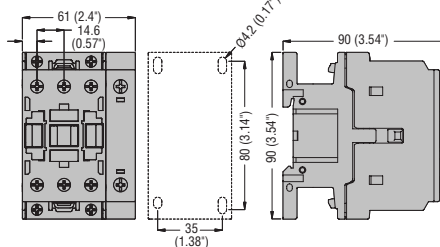

① DPBF32A fitted with fourth pole BFX42.