


**Product Selection —  
3-Pole Contactors**

**When Ordering Specify**

- Select required contactor by Catalog Number and replace the magnet coil alpha designation in the Catalog Number ( ) with the proper Code Suffix from **Tables 34-372 and 34-374**, on **Page 34-301**.
- For Sizes A – K, the magnet coil alpha designation is the second-to-last digit of the Catalog Number. Example: for a 240V/60 Hz coil, order CE15ANS3BB.



**IEC Size E  
Cat. No. CE15ENS3AB**



**IEC Size N  
Cat. No. CE15NN3A**

**Table 34-370. Type CE15/CE55 IEC Product Selection — 3-Pole Contactors**


Max. UL AC-3 Amp. Rating 600V AC	IEC 947 AC-1 Thermal Current 600V	Maximum kW Rating					Maximum UL Horsepower						3-Pole — Non-reversing <sup>①②</sup>		3-Pole — Reversing <sup>③</sup>	
		3-Phase					1-Phase		3-Phase				Catalog Number	Price U.S. \$	Catalog Number	Price U.S. \$
		220V	380V	415/440V	500/550V	660V	115V	230V	200V	230V	460V	575V				
7	20	1.1	2.2	2.2	4	1.5	1/4	1/2	1-1/2	1-1/2	3	5	CE15ANS3_B		CE55AN3_B	
10	20	1.5	4	4	5.5	2.2	1/2	1	2	2	5	7-1/2	CE15BNS3_B		CE55BN3_B	
12	20	2.2	5.5	5.5	7.5	4	1/2	2	3	3	7-1/2	10	CE15CNS3_B		CE55CN3_B	
18	32	4	7.5	7.5	11	5.5	1	3	5	5	10	15	CE15DNS3_B		CE55DN3_B	
25	32	5.5	11	11	15	7.5	2	3	5	7-1/2	15	20	CE15ENS3_B		CE55EN3_B	
32	32	7.5	15	15	18.5	10	2	5	7-1/2	10	20	25	CE15FNS3_B		CE55FN3_B	
37	50	—	18.5	18.5	22	11	3	5	7-1/2	10	25	30	CE15GNS3_B		CE55GN3_B	
44	60	11	22	22	30	15	3	7-1/2	10	15	30	40	CE15HNS3_B		CE55HN3_B	
60	75	15	30	30	30	18.5	5	10	15	20	40	40	CE15JNS3_B		CE55JN3_B	
73	80	18.5	37	37	37	22	5	10	20	25	50	50	CE15KNS3_B		CE55KN3_B	
85	100	22	45	45	55	37	7-1/2	10	25	30	60	75	CE15LN3_		CE55LN3_	
105	135	30	55	55	75	45	10	10	30	40	75	100	CE15MN3_		CE55MN3_	
140	175	37	75	75	90	45	10	10	40	50	100	125	CE15NN3_		CE55NN3_	
170	185	45	90	90	90	45	—	—	50	60	125	125	CE15PN3_		—	
200	220	55	110	110	110	55	—	—	60	75	150	150	CE15RN3_		—	
300	315	90	160	160	160	75	—	—	75	100	200	200	CE15SN3_		—	
420	600	129	220	240	300	300	—	—	125	125	250	250	CE15TN3_80		—	
520	760	160	280	315	375	375	—	—	150	150	350	350	CE15UN3_80		—	
550	1000	220	375	—	500	500	—	—	150	200	400	400	CE15VN3_80		—	
700	1000	220	375	—	500	500	—	—	200	250	500	500	CE15WN3_80		—	
810	1100	270	475	—	600	600	—	—	250	300	600	600	CE15XN3_80		—	
1215	1350	380	650	—	840	840	—	—	450	450	900	900	CE15ZN3_80		—	

- ① IEC Sizes A – N are supplied with a NO auxiliary contact. On IEC Sizes A – C, the 4th power pole position is used as the auxiliary contact and adds no additional width. Open type Sizes A – K can be ordered with a top mounted auxiliary contact instead of a side mounted contact. To order, change the 7th digit of the listed Catalog Number from “S” to “T”. Example: CE15ANT3AB. On open type Sizes A – K, if the NO auxiliary contact is not required, drop the “S” from the listed Catalog Number.
- ② Auxiliary contacts: Sizes P – S have 1NO-1NC, Sizes T – X have 2NO-2NC, Size Z has 2NO-1NC. Sizes T – Z are supplied without lugs — order appropriate lug kits from **Table 34-373** on **Page 34-301**.
- ③ Sizes A – K IEC contactors do not include holding circuit contacts. For factory installed NO auxiliary contacts, insert “S” (side mounted) or “T” (top mounted) after 6th digit of listed Catalog Number. Example: Change CE55AN3AB to CE55ANS3AB. For “T”, top mounted NC contact blocks are replaced with NO-NC blocks — for “S”, they are replaced with NO-NC side mounted blocks.

Accessories . . . . . **Pages 34-313 – 34-319**  
Discount Symbol . . . . . **1CD7**

Size and Dimensions (Inches)										
Product	IEC Size	Contactor Type								Ship Weight in Pounds
		Wide	High	Deep	Mounting					
		A	B	C	D	E	E1	F	G	
Starters	A-F	1.80	5.86	3.28	1.36	5.19	5.39	-	54	1.75
Contactors	A-C	1.80	2.96	3.26	1.36	1.96	-	-	54	1.3
Contactors	D-F	1.80	2.96	3.26	1.36	1.96	-	-	54	1.4
Overload Relays	32 Amp	1.77	4.13	3.69	1.36	3.74	-	-	-	0.8

### IEC contactor sizes A-F, CE15

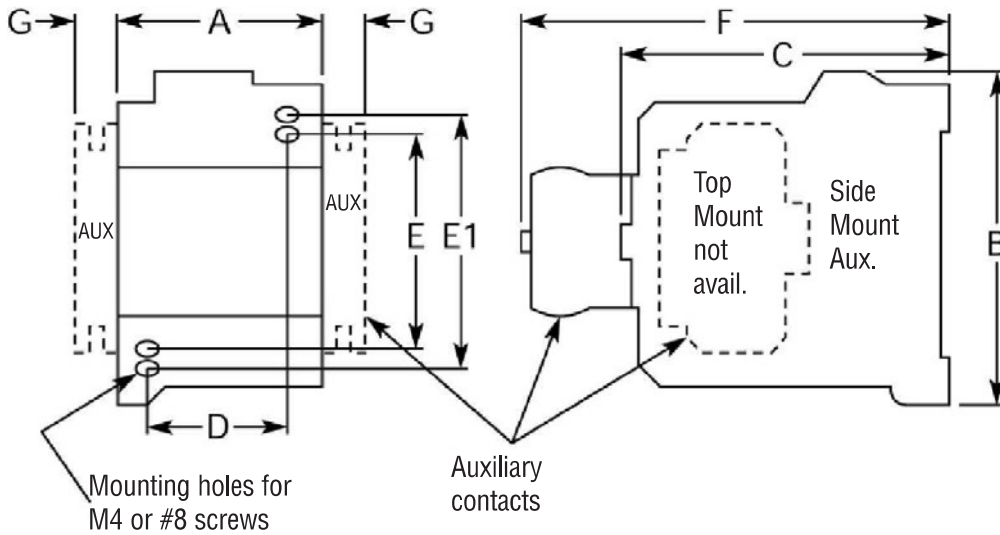

### IEC starter sizes A-F, AE16

