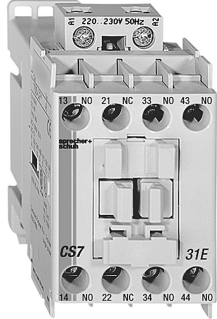






Series CS7 Standard Control Relays - 4 Pole ①④

CS7 Relay	Contact Arrangement and Numbering	Contacts ①		AC Operation		Electronic DC ⑥	
		NO	NC	Catalog Number	Price	Catalog Number	Price
 <p>CS7-31E</p>		2	2	CS7-22E-*	92	CS7E-22E-*	127
		3	1	CS7-31E-*			
		4	0	CS7-40E-*			
		0	4	CS7-04E-*			

Contact Ratings (Per UL508/NEMA A600 & P600)

Standard	Circuit Voltage	Make (Amps/VA)	Break (Amps/VA)	Continuous Amps
A600	120AC	60A/7200VA	6A/720VA	10
	240AC	30A/7200VA	3A/720VA	
	480AC	15A/7200VA	1.5A/720VA	
	600AC	12A/7200VA	1.2A/720VA	
P600	125DC ②	1.1A/138VA	1.1A/138VA	5
	250DC ②	0.55A/138VA	0.55A/138VA	
	301-600DC ②	0.2A/138VA	0.2A/138VA	

Other UL Ratings

Maximum Voltage	600 volts AC or DC
General Purpose Amps	
CS7	25 amps
Auxiliaries (@ 40°C)	10 amps
Auxiliaries (@ 60°C)	6 amps

AC Coil Codes ③

AC Coil Code	Voltage Range	
	50 Hz	60 Hz
24Z	24V	24V
120	110V	120V
208	~	208V
220W	200V-220V	208V-240V
240	220V	240V
277	240V	277V
380	380V-400V	440V
480	440V	480V
600	550V	600V

DC Coil Codes ⑤

DC Coil Codes	Voltage
12E	12V
24E	24V
36E ⑥	36-48V
48E ⑥	48-72V
110E ⑥	110-125V
220E ⑥	220-250V


Ordering Instructions

Specify Catalog Number	
Replace (*) with Coil Code	See Coil Codes on this page

- ① Side mounted and/or top auxiliaries may be field installed to increase the number of available poles, limitations apply. Refer to page G15 for ordering and restriction details. Please note that side mount auxiliary terminal markings may conflict with base relay and/or top mount auxiliary terminal markings.
- ② DC rating for CS7 base control relay.
- ③ Other voltages available, see page G13. *Non-standard coil voltages not listed here must be ordered and installed separately as renewal parts.*
- ④ Positively-Guided/Mechanically-Linked Contacts per IEC 947-5-1 Annex L on 4 main poles.
- ⑤ CS7E electronic coils are not interchangeable with non-electronic DC or AC coils.
- ⑥ Not applicable with Electronic Timer accessories (CRZ_7).

Series CS7 Industrial Control Relays (AC and Electronic DC)

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

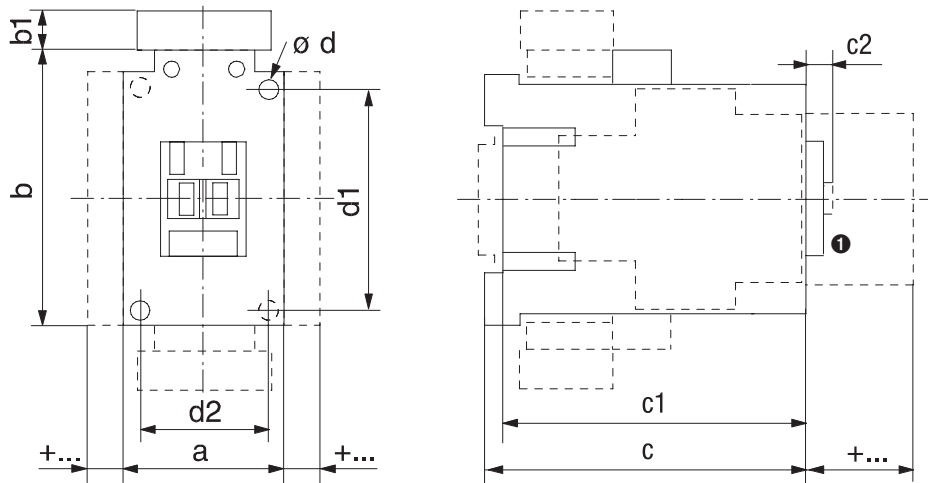


Catalog Number	Coil Code	a	b	b1	c	c1	c2	$\varnothing d$	d1	d2
CS7 (AC)	All	45 (1-25/32)	81 (3-3/16)	~	80.5 (3-11/64)	75.5 (3-3/32)	6 (1/4)	2-4.5 (2-3/16)	60 (2-23/64)	35 (1-25/64)
CS7 (Electronic DC)	12E...24E	45 (1-25/32)	81 (3-3/16)	~	80.5 (3-11/64)	75.5 (2-31/32)	6 (15/64)	2-4.5 (2-3/16)	60 (2-23/64)	35 (1-3/8)
	36E...220E	45 (1-25/32)	81 (3-3/16)	24 (15/16)	80.5 (3-11/64)	75.5 (2-31/32)	6 (15/64)	2-4.5 (2-3/16)	60 (2-23/64)	35 (1-3/8)

Relays & Accessories (+...)

Relays with...		Dim. [mm]	Dim. [inches]
auxiliary contact block for front mounting	2-, or 4-pole	c/c1 + 39	c/c1 + 1-37/64
auxiliary contact block for side mounting	1-, or 2-pole	a + 9	a + 23/64
pneumatic timing module		c/c1 + 58	c/c1 + 2-23/64
electronic timing module	on coil terminal side	b + 24	b + 15/16
mechanical latch		c/c1 + 61	c/c1 + 2-31/64
interface module	on coil terminal side	b + 9	b + 23/64
surge suppressor	on coil terminal side	b + 3	b + 1/8
1 Labeling with...	label sheet	+ 0	+ 0
	marking tag sheet with clear cover	+ 0	+ 0
	marking tag adapter for V7 Terminals	+ 5.5	+ 7/32

Mounting Position

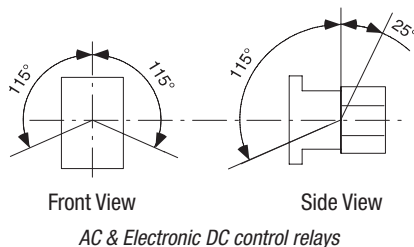

G
CS7 Control Relays