


● MMS 32H, 32HI

[mm]

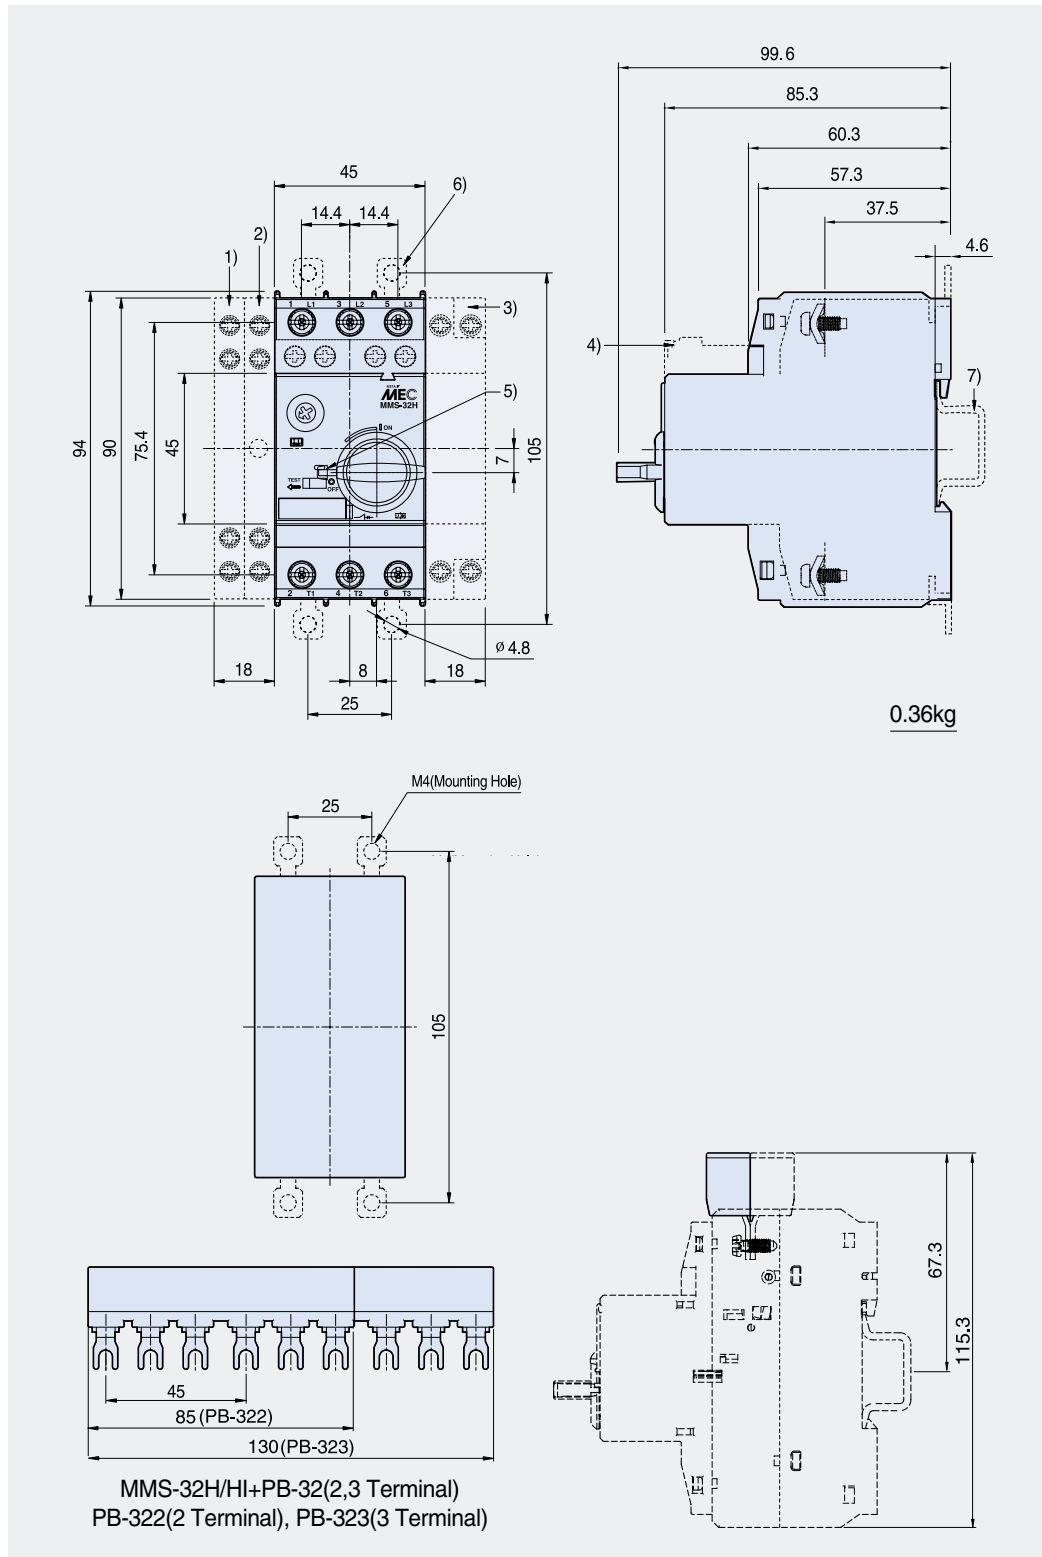

- 1) Side auxiliary switch
- 2) Side magnetic trip alarm switch
- 3) Side shunt release or Side undervoltage release
- 4) Front auxiliary switch
- 5) Handle lock in OFF position(\varnothing 5mm)
- 6) Push-in Lugs for screw mounting
- 7) 35mm standard mounting rail acc. to EN 50 022

MMS-32H/HI+PB-32(2,3 Terminal)
PB-322(2 Terminal), PB-323(3 Terminal)